SALEEN FRONT LICENSE PLATE MOUNTING KIT

Install nut inserts
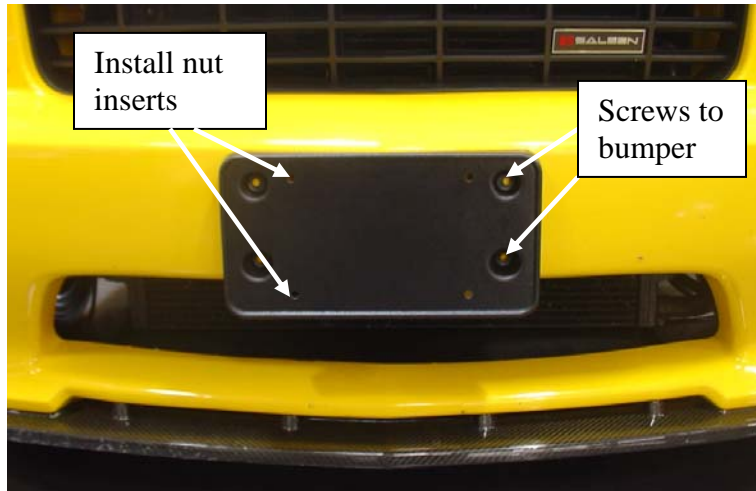
Screws to bumper

1. Place the license plate mounting bracket against the front fascia, in the center as shown. Align the top of the mounting bracket just below the corner where the vertical and horizontal sections of the front fascia meet.
2. Mark the hole locations for the 4 holes that will accept screws to hold the bracket to the fascia (see "screws to bumper in figure above). Drill a 5/32" pilot hole into the locations marked.
3. Fasten the bracket to the fascia with the four supplied screws.
4. Install the white nut inserts into the holes (see figure above).
5. Attach the license plate to the bracket by driving the large bolts into the nut inserts; use an electric drill with a flathead bit or 8mm socket.

Manual P/N: 10-8002-C14995C

SALEEN